


# Bridge Wing Display



KONGSBERG

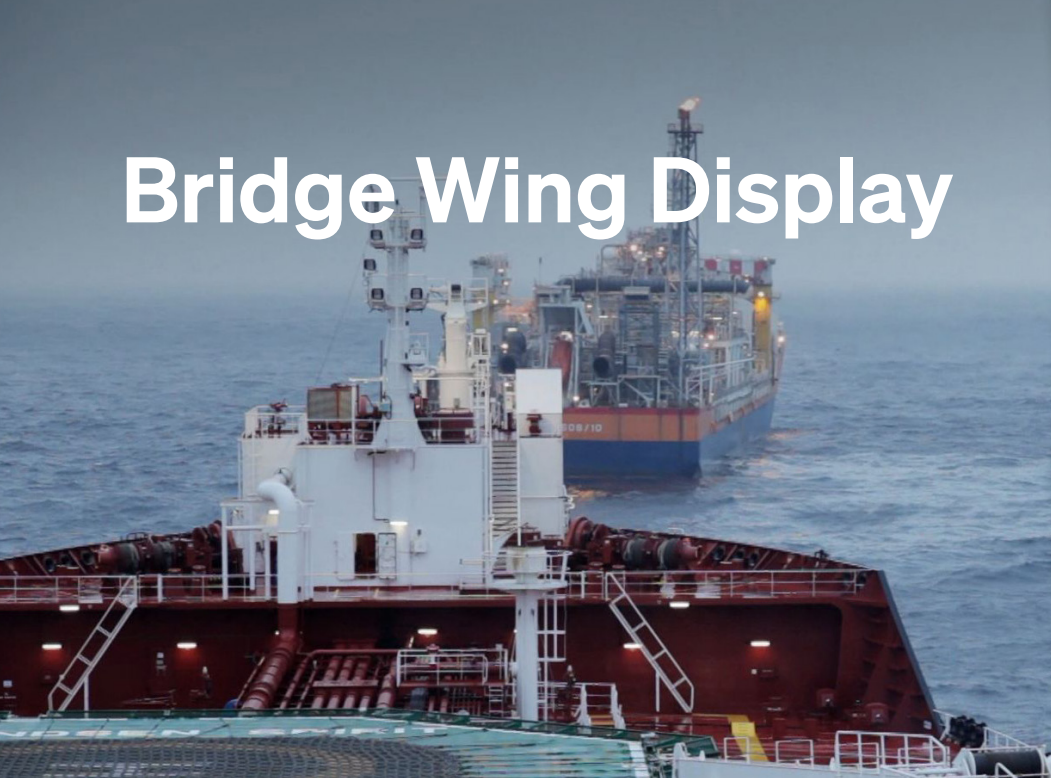

## Information at your fingertips

The Bridge Wing Display can be mounted on the bridge wing to monitor vessel speed and heading. It is a touch display, which is quick to install and easy to operate. With one display on each wing, each display will use data from one or two DARPS units. Communication between the DARPS unit and the Bridge Wing Display is done through Ethernet.

## Technical specifications

### Weights and dimensions

Dimensions 253 × 198 × 37 mm  
Weight 1.6 kg

### Power specifications

Voltage 18 - 32 VDC  
Power consumption 11 W @ 24 V (50% brightness)  
14 W @ 24 V (100% brightness)

### Environmental specifications

Operating temperature -10 °C - +55 °C  
Op. temp. recommended +25 °C  
Storage temperature -25 °C - +70 °C  
Operating humidity 95% non-condensing  
Enclosure material Die cast and painted aluminium  
Enclosure protection IP56 (flush/console)  
IP22 (VESA mount)

*Specifications subject to change without any further notice.*