

# XPR® 100



KONGSBERG



## Long-range relative positioning system

The XPR 100 is a microwave-based solution developed for DP (Dynamic Positioning) applications in need of long-range relative positioning. With no moving parts and with its compact and lightweight design, the XPR installation is simple and quick.

### Long-range operation

Operating in the 9.2 - 9.3 GHz band, the XPR 100 operates in all weather conditions, and has an unmatched performance in range and bearing accuracy. Each lightweight sensor unit has an opening angle of 100 degrees.

### Multiple sensor units

The XPR 100 can be deployed as an omni directional system utilising several sensor units. This provides an extended operational area of up to 280 degrees, as well as avoidance of blind angles, depending on the construction and operation.

The application software makes configuration and monitoring of the XPR 100 operation easy and effective. Interfaces to remote systems such as Dynamic Positioning (DP) can either be serial lines or Ethernet based. The XPR 100 is designed to fill the need specified by IMO for DP Class 2 vessels.

### Automatic target selection

Targets are stored in the system, and continuous monitoring in all directions (area of operation) mitigates false target lock, and secures a very fast target acquisition.

### Built-in system test and verification


Prior to an operation, the XPR 100 performs a check and verification of the system to secure a safe and efficient operation.

### Easily operated user interface

The XPR 100 features a highly intuitive graphical user interface enabling the operators to assess the quality of their positioning quickly and effectively during operation. For better visibility under different light conditions, the operator can easily select between a set of colour palettes, including a well proven night display.


### Complementary solution

KONGSBERG offers a range of different positioning solutions for use in DP operations. The XPR 100 is complementary to other solutions technology-wise, and incorporates decades of experience and application understanding.

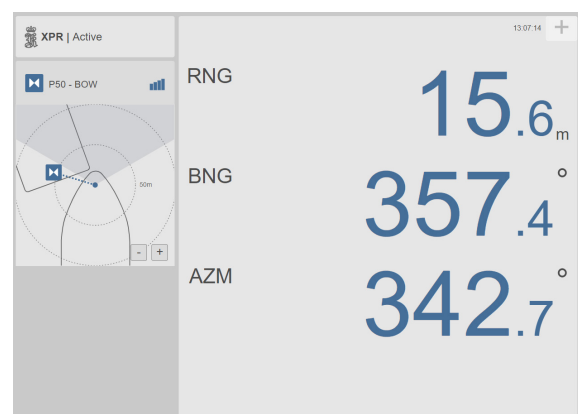

## FEATURES

- No moving parts
- No regular maintenance
- Compact and light-weight sensor unit
- Easy and quick installation
- Support for multi-sensor site for extended operational area (100° - 280° coverage)
- Automatic built-in system test prior to operation
- Automatic target selection
- Compatible with Artemis MK4, MK5 and MK6
- Use of existing Artemis cable infrastructure possible
- Operates in all weather conditions

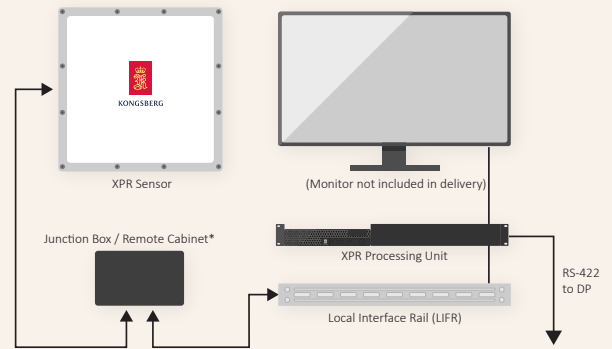

\*Dependent on type of installation

## Technical specifications

### XPR® 100

#### Performance

Operating range	10 m - 5 km
Range accuracy	1 m standard deviation
Range resolution	0.1 m
Range update rate	4 Hz
Bearing accuracy	0.02° standard deviation
Bearing update rate	4 Hz
Horizontal opening angle	± 50°
Vertical opening angle	± 12.5°
Operating frequency band	9.2 - 9.3 GHz
EIRP	48 dBm

#### Interfaces

##### Sensor Unit

Ethernet/LAN	1
--------------	---

##### Processing Unit

Serial ports	6 x RS-422/RS-232 (isolated)
Ethernet/LAN	4, RJ45
USB	3, 1 in front and 2 in rear

#### Data outputs

Message formats	Proprietary NMEA 0183
Message types	PSXXPR, RSXRAD, Artemis BCD, Artemis ADB

#### Weights and dimensions

##### Sensor Unit

Dimensions	391 × 391 × 50 mm
Weight	9.9 kg

##### Processing Unit

Dimensions	88 × 485 × 412 mm
Weight	5.4 kg

#### Power specifications

##### Sensor Unit

Input voltage	24 VDC
Power consumption	70 W max.

##### Processing Unit

Input voltage	100 - 240 VAC, 50/60 Hz
Power consumption	170 W max.

#### Environmental specifications

##### Sensor Unit

Operating temperature range	-25 - +55 °C
Storage temperature range	-40 - +70 °C
Operating humidity	100 %
Storage humidity	60 %, max.
Enclosure protection	IP66

##### Processing Unit

Operating temperature	+10 - +35 °C
Storage temperature	-40 - +60 °C
Operating humidity	20 - 80 %
Storage humidity	10 - 90 %
Enclosure material	Steel, Aluzinc, plastic

#### Mechanical

Vibration, all units	IEC 60945, IACS E10
----------------------	---------------------

#### Electromagnetic compatibility

Compliance to EMC, immunity/emission	IEC 60945, IACS E10
--------------------------------------	---------------------

#### Regulatory

EU	Radio Equipment Directive (RED) 2014/53/EU
ANATEL	This equipment is not entitled to protection against harmful interference and may not cause interference to duly authorized systems

#### Certificates

DNV certificate no.	TAA000020DX (type approval)
ANATEL certificate no.	02359-24-03288

\* Registered trademark USA.

Specifications subject to change without any further notice.