

XPR® 100 Ex LP



KONGSBERG



Low-power Ex certified relative positioning system

The XPR 100 Ex LP is a microwave-based solution developed for DP (Dynamic Positioning) applications in need of long-range relative positioning. With no moving parts and with its compact and lightweight design, the XPR installation is simple and quick.

Long-range operation

Operating in the 9.2 - 9.3 GHz band, the XPR 100 Ex LP operates in all weather conditions, and has an unmatched performance in range and bearing accuracy. Each lightweight sensor unit has an opening angle of 100 degrees.

Multiple sensor units

The XPR 100 Ex LP can be deployed as an omni directional system utilising several sensor units. This provides an extended operational area of up to 280 degrees, as well as avoidance of blind angles, depending on the construction and operation.

The application software makes configuration and monitoring of the XPR 100 Ex LP operation easy and effective. Interfaces to remote systems such as Dynamic Positioning (DP) can be either serial lines or Ethernet based. The XPR 100 Ex LP is designed to fill the need specified by IMO for DP Class 2 vessels.

Automatic target selection

Targets are stored in the system, and continuous monitoring in all directions (area of operation) mitigates false target lock, and secures a very fast target acquisition.

Built-in system test and verification

Prior to an operation, the XPR 100 Ex LP performs a check and verification of the system to secure a safe and efficient operation.

Easily operated user interface

The XPR 100 Ex LP features a highly intuitive graphical user interface enabling the operators to assess the quality of their positioning quickly and effectively during operation. For better


visibility under different light conditions, the operator can easily select between a set of colour palettes, including a well proven night display.

Complementary solution

KONGSBERG offers a range of different positioning solutions for use in DP operations. The XPR 100 Ex LP is complementary to other solutions technology-wise, and incorporates decades of experience and application understanding.


IECEx and ATEX certification

The XPR 100 Ex LP is suitable for installation in hazardous locations where there may be an explosive mixture of flammable gases belonging to gas group II B and/or II A. The XPR 100 Ex LP can be installed in Ex zone 2. The IECEx classification is Ex ec IIB T4 Gc. The ATEX classification is II 3G Ex ec IIB T4 Gc.

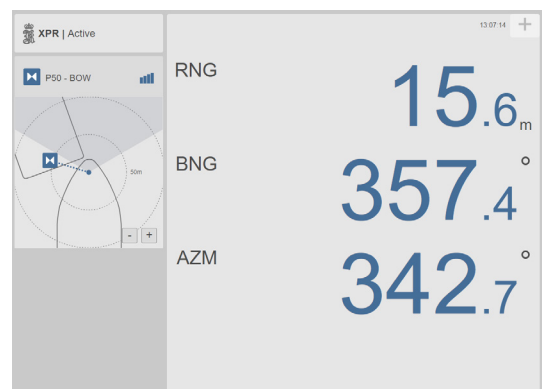

FEATURES

- No moving parts
- No regular maintenance
- Compact and light-weight sensor unit
- Easy and quick installation
- Support for multi-sensor site for extended operational area (100° - 280° coverage)
- Automatic built-in system test prior to operation
- Automatic target selection
- Compatible with Artemis MK4, MK5 and MK6
- Use of existing Artemis cable infrastructure possible
- Operates in all weather conditions

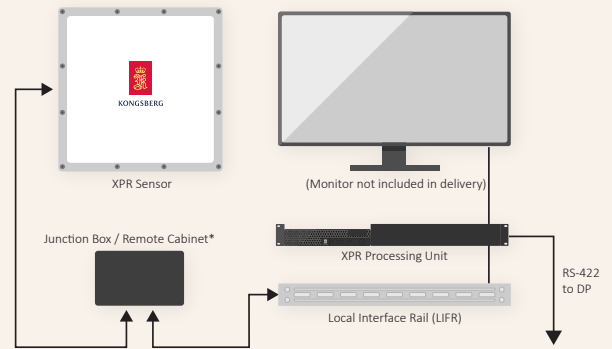

*Dependent on type of installation

Technical specifications

XPR® 100 Ex LP

Performance

Operating range	10 m - 5 km
Range accuracy	1 m standard deviation
Range resolution	0.1 m
Range update rate	4 Hz
Bearing accuracy	0.02° standard deviation
Bearing update rate	4 Hz
Horizontal opening angle	± 50°
Vertical opening angle	± 12.5°
Operating frequency band	9.2 - 9.3 GHz
EIRP	35 dBm

Interfaces

Sensor Unit

Ethernet/LAN	1
--------------	---

Processing Unit

Serial ports	6 x RS-422/RS-232 (isolated)
Ethernet/LAN	4, RJ45
USB	3, 1 in front and 2 in rear

Data outputs

Message formats	Proprietary NMEA 0183
Message types	PSXXPR, RSXRAD, Artemis BCD, Artemis ADB

Weights and dimensions

Sensor Unit

Dimensions	391 × 391 × 50 mm
Weight	9.9 kg

Processing Unit

Dimensions	88 × 485 × 412 mm
Weight	5.4 kg

Power specifications

Sensor Unit

Input voltage	24 VDC
Power consumption	70 W max.

Processing Unit

Input voltage	100 - 240 VAC, 50/60 Hz
Power consumption	170 W max.

Environmental specifications

Sensor Unit

Operating temperature range	-25 °C - 55 °C
Storage temperature range	-40 °C - 70 °C
Operating humidity	100 %
Storage humidity	60 %, max.
Enclosure protection	IP66

Processing Unit

Operating temperature	+10 - +35 °C
Storage temperature	-40 - +60 °C
Operating humidity	20 - 80 %
Storage humidity	10 - 90 %
Enclosure material	Steel, Aluzinc, plastic

Mechanical

Vibration, all units	IEC 60945, IACS E10
----------------------	---------------------

Electromagnetic compatibility

Compliance to EMC, immunity/emission	IEC 60945, IACS E10
--------------------------------------	---------------------

Regulatory

EU	Radio Equipment Directive (RED) 2014/53/EU
ANATEL	This equipment is not entitled to protection against harmful interference and may not cause interference to duly authorized systems

Certificates

ATEX certificate no.	DEKRA 20ATEX0020 X
IECEX certificate no.	IECEX DEK 21.0042X
ANATEL certificate no.	02359-24-03288

* Registered trademark USA.

Specifications subject to change without any further notice.