All rights reserved. Specifications subject to change without notice.

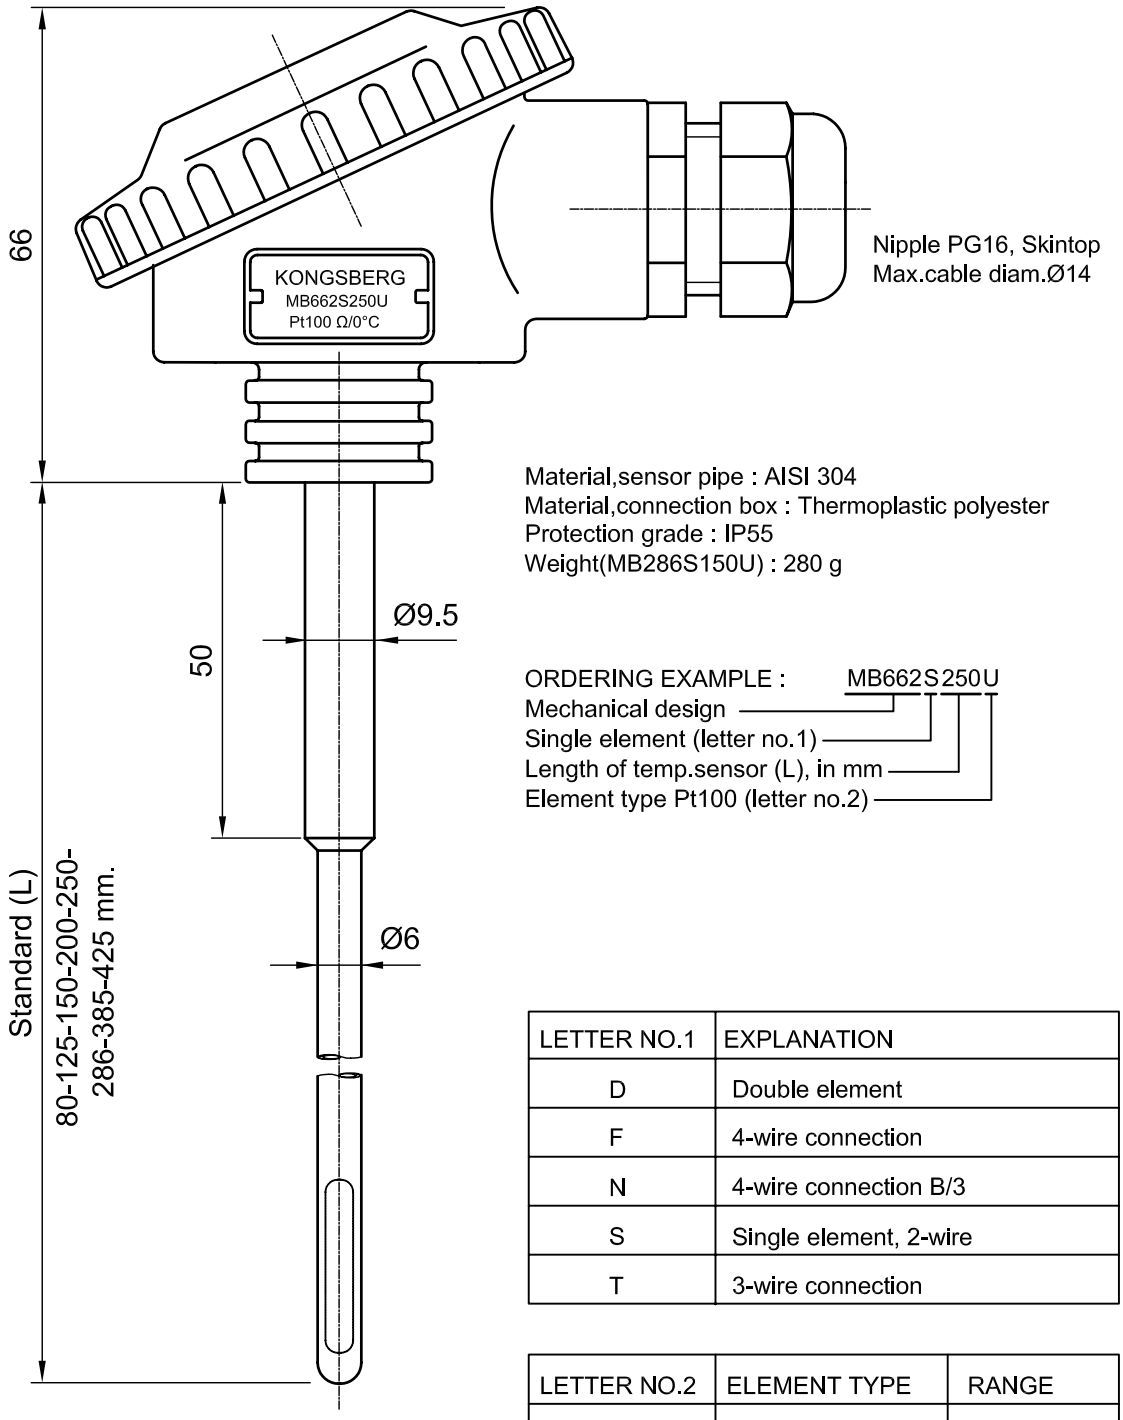

Material,sensor pipe : AISI 304
Material,connection box : Thermoplastic polyester
Protection grade : IP55
Weight(MB286S150U) : 280 g

ORDERING EXAMPLE : MB662S250U
Mechanical design
Single element (letter no.1)
Length of temp.sensor (L), in mm
Element type Pt100 (letter no.2)

LETTER NO.1	EXPLANATION
D	Double element
F	4-wire connection
N	4-wire connection B/3
S	Single element, 2-wire
T	3-wire connection

LETTER NO.2	ELEMENT TYPE	RANGE
M	Pt1000 ohm/0°C	-50-600°C
U	Pt100 ohm/0°C	-50-600°C

Rev.	Description	Date/Sign.
A	New nipple, 981201, MaV/AJK	

Date	Dsgn/Dwn	Trac	Scale/Format
1989-05-06	A.K./O.L.		1:1 [A4]
Checked	Spec Ctrl.	Approved	
	1,2 S		

Temperatur sensor type MB662----

DIMENSIONAL SKETCH

Kongsberg Maritime AS
Automation
Trondheim

Repl. for	Repl. by	Next sheet

Dwg no.	Sh.no.	Rev.	Lang.
MB-662		A	

0449