


ORDERING EXAMPLE: MN2666S75U15

Mechanical design _____
 Single element (letter 1) _____
 Length, L [mm] _____
 Element type, Pt100 (letter 2) _____
 Cable length, CL [dm] _____

- REMARKS**
1. Material, sensor pipe: AISI 304
 2. Protection grade: IP67
 3. Weight, MN2666S75U15: 85 gram
 4. Temp. range sensor: -50° to 200°C
 5. Temp. range cable: -65° to 155°C
 6. Classification approvals:
 LRS, DNV, GL, RINA, ABS, BV, MRS

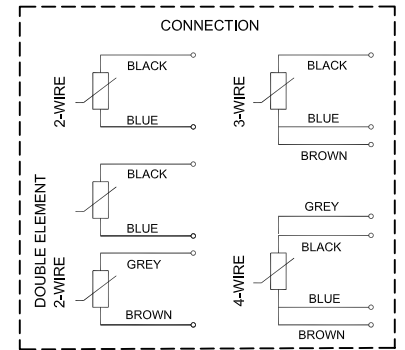

LETTER NO.1	EXPLANATION
A	Single element, 4-wire, class A
D	Double element, 2x2-wire
F	Single element, 4-wire
N	Single element, 4-wire, B/3
S	Single element, 2-wire
T	Single element, 3-wire

LETTER NO.2	ELEMENT TYPE	RANGE
M	Pt1000 ohm/0°C	-50° to 200°C
U	Pt100 ohm/0°C	-50° to 200°C

Date 90-12-07	Dsgn/Dwn AL/ES	Trac	Scale/Format 1:1
Checked JSK	Spec Ctrl.	Approved AJK	

Temperature sensor
type MN2666-

DIMENSIONAL SKETCH

MN-3938

Kongsberg Maritime AS
Automation
Trondheim

Repl. for	Repl. by	Next sheet
Dwg no. MN-2666	Sh.no.	Rev. Lang. E

IP67-IP67 981105 ALK/MeV	98-04-19 ELS/AJK	Description Date/Sign.
D	C	Rev.
Pt1000 in. 001101. MaV/AJK		Description Date/Sign.
E		Rev.

F
E
D
C
B
A
0449