

B							
A	Kabel 3x0,75 mm, 96-11-21 ELS/ Standard L=100, 95-03-28 ELS/	D	C	7170-013.4875 in, 041220, MaV/AJK Letter V out, 030804, VRa/AJK	Description	Date/Sign.	
Rev.	Zone	Rev.	Zone	Description	Date/Sign.		

LETTER NO.1	EXPLANATION
D	Double element, 2-wire
F	Single element, 4-wire
N	Single element, 4-wire, 1/3 DIN
S	Single element, 2-wire
T	Single element, 3-wire


LETTER NO.2	ELEMENT TYPE	RANGE
C	Ni100	-50-130 °C
M	Pt1000 ohm/0 °C	-50-130 °C
U	Pt100 ohm/0 °C	-50-130 °C

ORDERING EXAMPLE : **MN3660 S 100 U 15**

Mechanical design ———  
 Single element (Letter no.1) ———  
 Length (L), in mm ———  
 Element type Pt100 (Letter no.2) ———  
 Cable length (CL), in decimeter ———

**REMARKS**

1. Material, sensor pipe : AISI 304
2. Protection grade : IP68
3. Weight (MN3660S100U15) : 150 g.

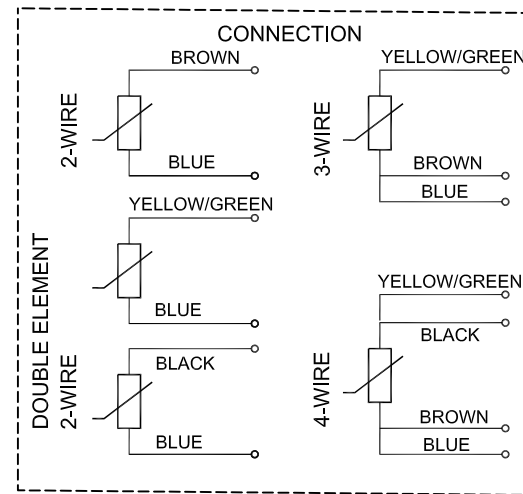

Date	1995-02-07	Dsgn/Dwn	AJK/ELS	Trac		Scale	1:1 [A3]
Checked	B.Sw.	Spec Ctrl.	AJK	Approved			



**Kongsberg Maritime AS**  
Automation  
Trondheim

Temperature sensor MN3660-

**DIMENSIONAL SKETCH**

Ref.	Next sheet
Dwg no.	Sh.no. Rev.
<b>MN-3660</b>	<b>D</b>